


Technical data and dimensions

Type	RolTop S1.5/70-868	RolTop S3/30-868	RolTop S5/30-868	RolTop S5-868	RolTop S8-868	RolTop S12-868
Roller shutter	-	-	•	•	•	•
Blinds	•	•	•	-	-	-
Operating Voltage (V)	1 ~ 230					
Frequency (Hz)	50					
Noiseless soft brake	•					
Fast-running version	•					
Max. torque (Nm)	1.5	3	5		8	12
Speed (rpm)	70	30		17		
Current (A)	0.55		0.73	0.55		0.73
Power (W)	130		168	130		168
Shaft Ø (mm)	38					
Ingress protection (IP)	44					
Max. limit switch range in Revolutions of the shaft	160	80		40		
Operating mode (KB in min.)	5		4	5	4	
Length A (mm)	545					
Length B (mm)	515.5					
Weight (kg)	1.3	1.2	1.3	1.2	1.3	
Temperature range (°C)	-20 to +60					
Conformity						
Connecting cable, pluggable (m)	2.0					
White motor head	•					
Accessories included	-					
	On request included (only on 17 rpm drives): "T"-head for motor to suit older Type 8 (restores backwards compatibility to Type 8 motors). RevoLine head for motor (item no. 99 000.7501) (enables use of RevoLine brackets).					

Item Number	30 222.0006	30 212.0006	30 232.0006	30 234.0006	30 254.0006	30 814.0006
-------------	-------------	-------------	-------------	-------------	-------------	-------------

All drives are exclusive of: drive adapter, wall bracket (motor bearing) and switches.

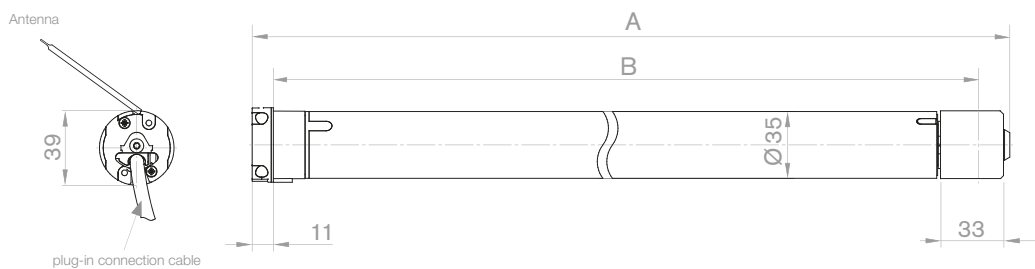

Accessories

