


Technical data and dimensions


Type	Revio-868	Revio-868 P	Revio-868 SW
Operating Voltage (V)		1 ~ 230 – 240	
Frequency (Hz)		50 – 60	
Maximum switching current (A)		3	
Term duration (Min.)		3 (JA) / 2 (RM)	∞ (SW) / 5 (JA) / 5 (RM)
Ingress protection (IP)		20	
Temperature range (°C)		0 to +55	
Radio frequency (MHz)		868	
Dimensions (mm)		L 50 x W 48 x H 27	
Weight (g)		52	
Type of installation		Flush mount: Requires at least Ø 58 mm flush mount box, 28 mm deep Exposed: in appropriate exposed casing	
Potential-free output	-		•
Unidirectional		•	
Bidirectional		•	
Group controller	-	•	-
Limit switch detection	•		-

Item Number	28 400.0006	28 410.0006	28 415.0006
-------------	-------------	-------------	-------------


Revio-868

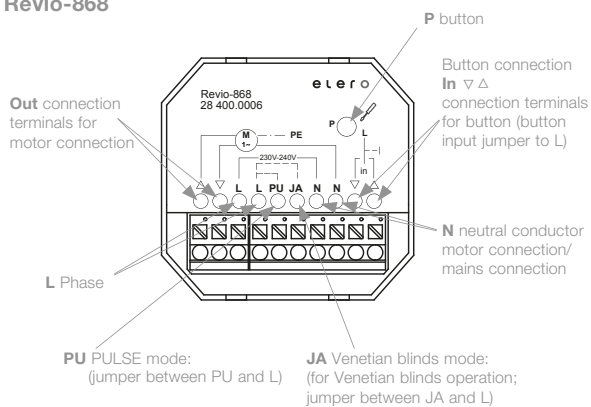

Revio-868 P

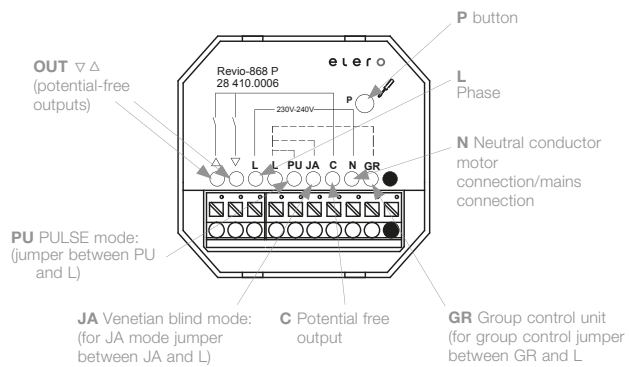

Revio-868 SW

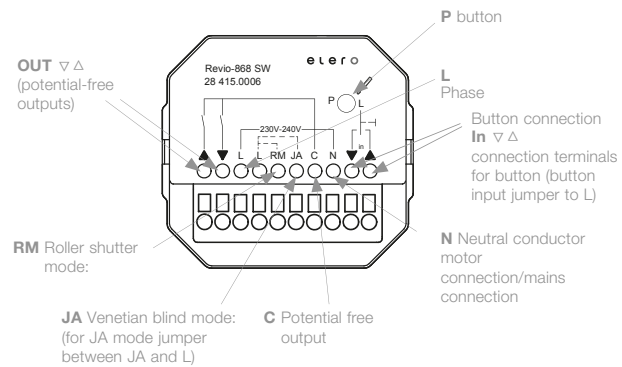

Accessories



Radio control units from page 176



Radio sensors from page 204